


CROWN

PRODUCT FORMS


- **CROWN ECO** Double Motor With Middle Pillar

S1




- **CROWN** Double Motor Without Middle Pillar

S2




- **CROWN** Double Motor With Middle Pillar

S3




- **CROWN ECO** Single Motor

S4





- **CROWN** Single Motor


S5




S1 ECO




ALM.PRF.090




ALM.PRF.011





ALM.PRF.010




ALM.PRF.003




ALM.PRF.099

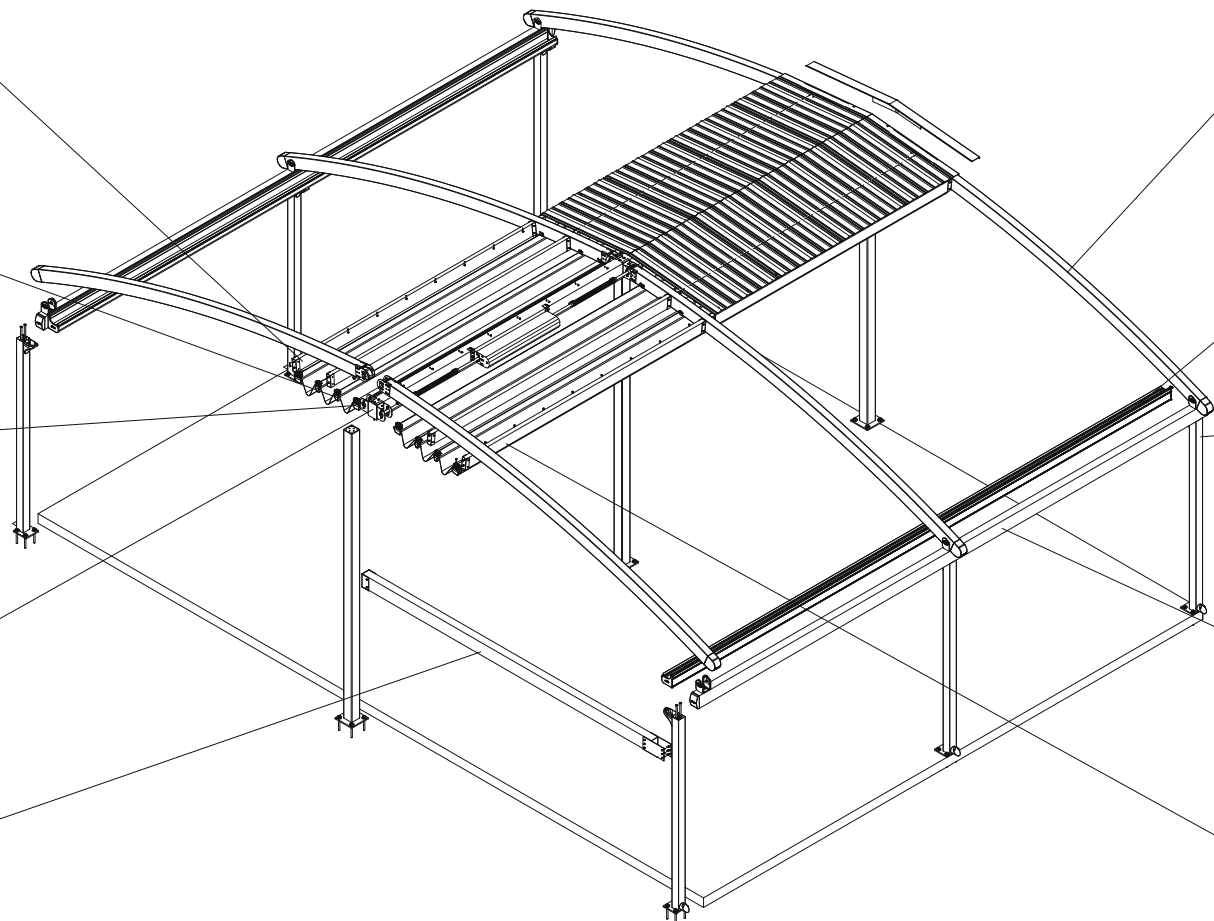


ALM.PRF.101




ALM.PRF.102



ALM.PRF.098




ALM.PRF.099



ALM.PRF.090

TECHNICAL FEATURES

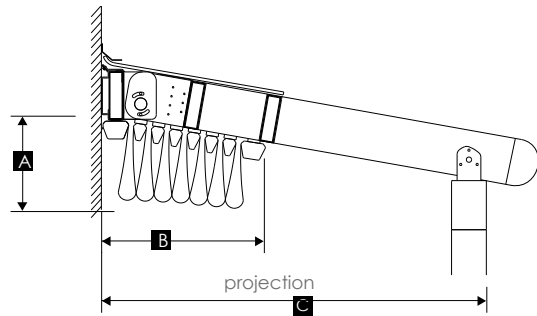


MAXIMUM DIMENSIONS

	WIDTH	PROJECTION
2 RAILS	400 cm	1200 cm
3 RAILS	800 cm	1200 cm
4 RAILS	1200 cm	1200 cm
5 RAILS	1300 cm	1200 cm

DOWN PIPE & GUTTER CALCULATION

Type	Max. m ²	Max. Gutter Length
Standard (ø 60mm)	39 m ² /pcs	800 cm

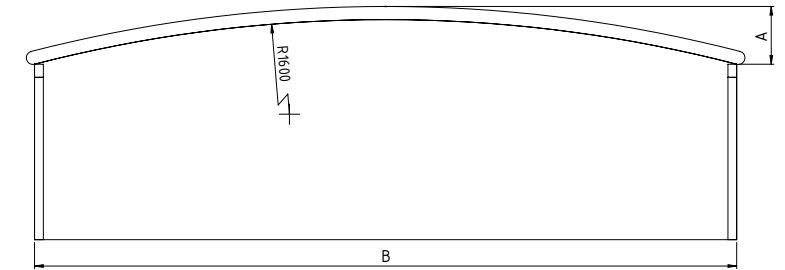

No of Fabric Support Profiles	Projection cm								
	160	219	279	338	397	457	515	576	C
3	35								36
4	22	32							42
5	18	25	33						48
6		22	29	35					54
7			25	31	35				60
8				29	31	35			66
9					29	33	36		72
10						31	34	37	78
11							32	35	84
12								34	90

RADIUS



A	22 cm	27 cm	34 cm	43 cm
B	300 cm	400 cm	500 cm	600 cm

A	95 cm	112 cm	131 cm
B	1000 cm	1100 cm	1200 cm


WIND RESISTANCE

PROJECTION (cm)	WIDTH (cm)																	
	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
800	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
900	11	11	11	11	11	11	11	10	10	10	11	11	11	11	10	10	10	10
1000	11	11	11	10	10	10	10	10	9	9	10	10	10	10	10	10	9	9
1100	11	10	10	10	9	9	9	9	9	8	9	9	9	9	9	9	9	9
1200	10	9	9	9	9	8	8	8	8	8	9	9	8	8	8	8	8	8


*The values are given according to the Beaufort scale.




DMR.PRF.015




DMR.PRF.036





ALM.PRF.059




ALM.PRF.011




ALM.PRF.010

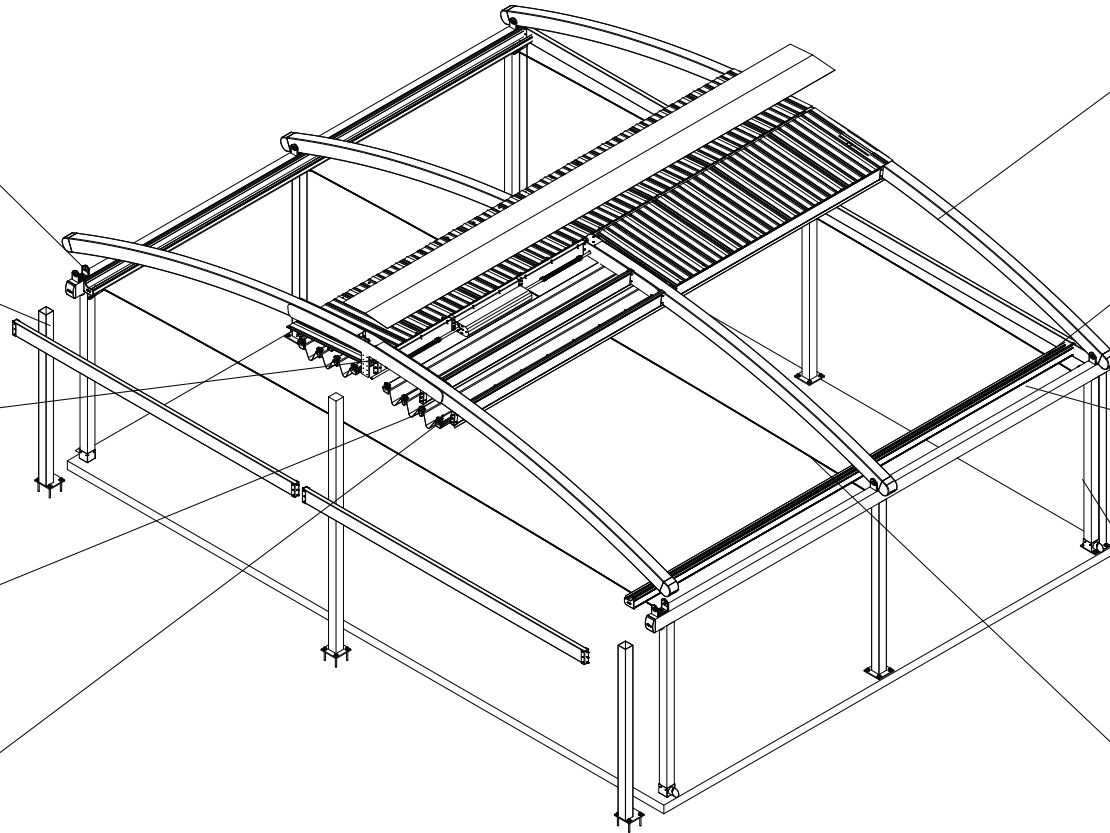


ALM.PRF.109




ALM.PRF.102




DMR.PRF.015



ALM.PRF.002



TECHNICAL FEATURES

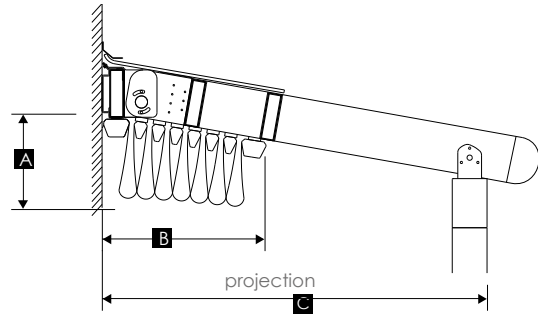


MAXIMUM DIMENSIONS

	WIDTH	PROJECTION
2 RAILS	400 cm	1000 cm
3 RAILS	800 cm	1000 cm
4 RAILS	1200 cm	1000 cm
5 RAILS	1300 cm	1000 cm

DOWN PIPE & GUTTER CALCULATION

Type	Max. m ²	Max. Gutter Length
Standard (ø 60mm)	39 m ² /pcs	800 cm

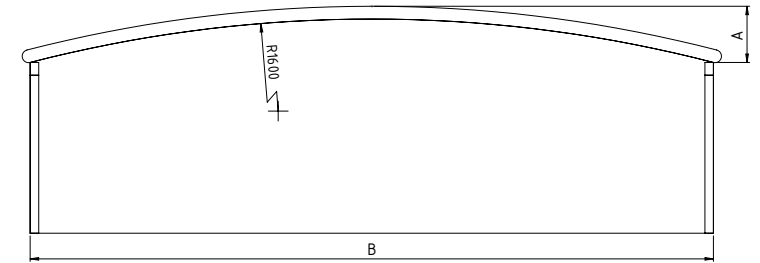

RADIUS



A	22 cm	27 cm	34 cm	43 cm	53 cm	65 cm	95 cm
B	300 cm	400 cm	500 cm	600 cm	700 cm	800 cm	1000 cm

No of Fabric Support Profiles	Projection cm											C	
	160	219	279	338	397	457	515	576	635	694	753		812
3	35												36
4	22	32											42
5	18	25	33										48
6		22	29	35									54
7			25	31	35								60
8				29	31	35							66
9					29	33	36						72
10						31	34	37					78
11							32	35	38				84
12								34	36	39			90
13									35	37	40		96
14										36	38	41	102
15											37	39	108
16												38	114


WIND RESISTANCE

PROJECTION (cm)	WIDTH (cm)																	
	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
400	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
500	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
600	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
700	11	11	11	11	10	10	10	10	10	9	10	10	10	10	10	10	10	9
800	10	10	10	9	9	9	9	9	9	8	9	9	9	9	9	9	9	8
900	10	9	9	9	9	8	8	8	8	8	9	9	8	8	8	8	8	8
1000	9	9	8	8	8	8	8	7	7	7	8	8	8	8	8	7	7	7


*The values are given according to the Beaufort scale.




ALM.PRF.003





ALM.PRF.001




ALM.PRF.011




ALM.PRF.010

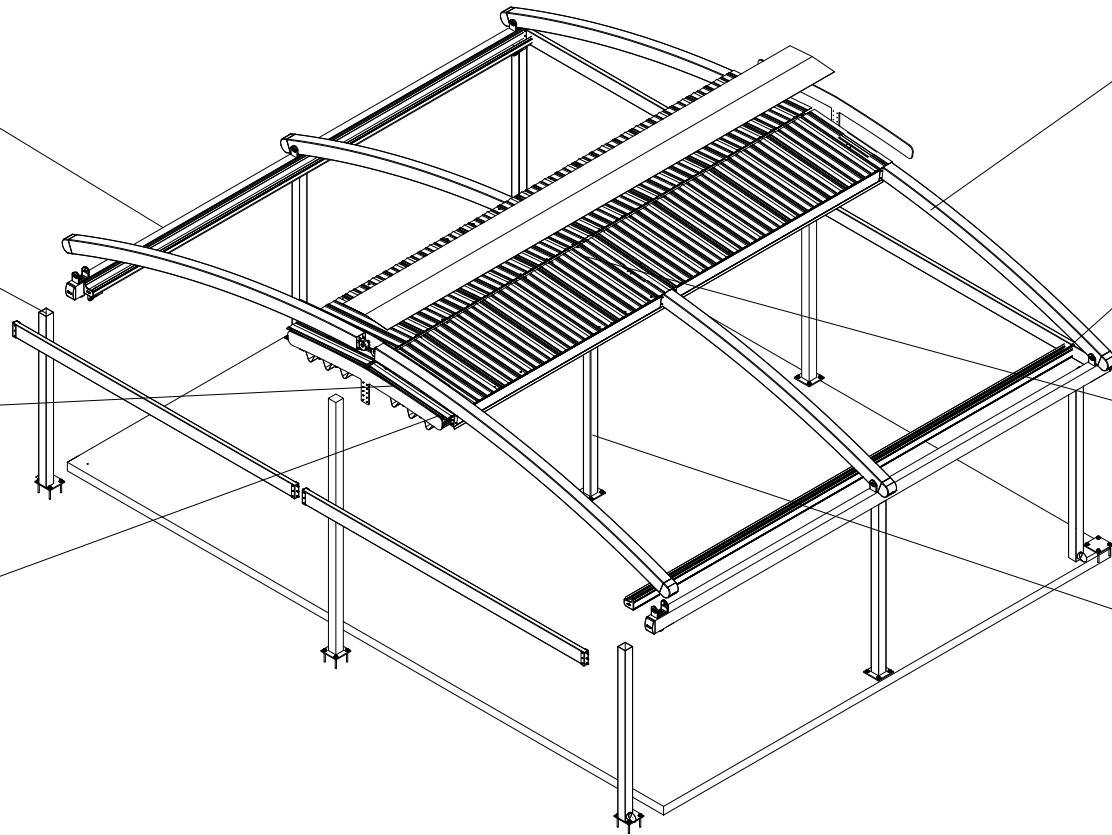


ALM.PRF.109



ALM.PRF.102




DMR.PRF.015



DMR.PRF.036

TECHNICAL FEATURES

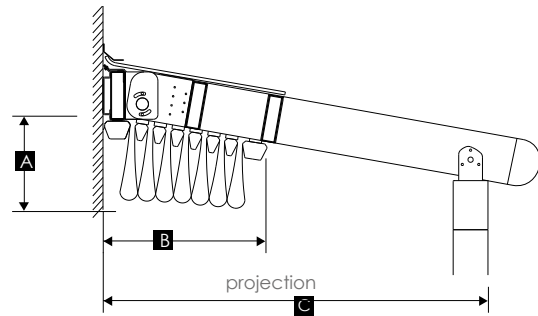


MAXIMUM DIMENSIONS

	WIDTH	PROJECTION
2 RAILS	400 cm	1600 cm
3 RAILS	800 cm	1600 cm
4 RAILS	1200 cm	1600 cm
5 RAILS	1300 cm	1600 cm

DOWN PIPE & GUTTER CALCULATION

Type	Max. m ²	Max. Gutter Length
Standard (ø 60mm)	39 m ² /pcs	800 cm

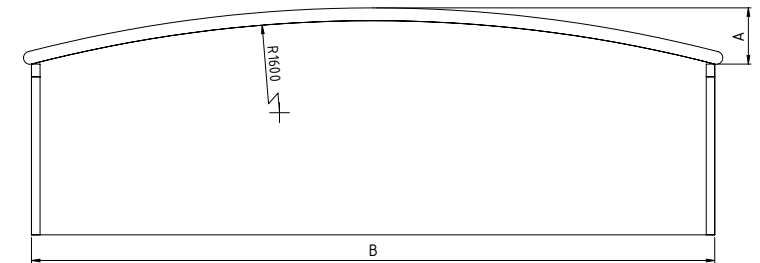

RADIUS

	A	22 cm	27 cm	34 cm	43 cm	53 cm	65 cm
B	300 cm	400 cm	500 cm	600 cm	700 cm	800 cm	

	A	95 cm	112 cm	131 cm	152 cm	176 cm	201 cm	229 cm
B	1000 cm	1100 cm	1200 cm	1300 cm	1400 cm	1500 cm	1600 cm	

No of Fabric Support Profiles	Projection cm												
	160	219	279	338	397	457	515	576	635	694	753	812	C
3	35												36
4	22	32											42
5	18	25	33										48
6		22	29	35									54
7			25	31	35								60
8				29	31	35							66
9					29	33	36						72
10						31	34	37					78
11							32	35	38				84
12								34	36	39			90
13									35	37	40		96
14										36	38	41	102
15											37	39	108
16												38	114

← A → B

WIND RESISTANCE

PROJECTION (cm)	WIDTH (cm)																		
	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	
800	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
900	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
1000	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
1100	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
1200	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
1300	11	11	11	11	11	11	11	11	10	10	10	11	11	11	11	10	10	10	10
1400	11	11	11	11	10	10	10	10	10	10	10	10	10	10	10	10	10	10	9
1500	11	11	10	10	10	10	10	9	9	9	9	10	10	10	9	9	9	9	9
1600	10	10	10	9	9	9	9	9	9	8	9	9	9	9	9	9	9	9	8

*The values are given according to the Beaufort scale.